

FLI IDENTIFIES FIVE LEAK PATHS IN TWO HIGH TEMPERATURE SUSPENDED GAS WELLS AHEAD OF SCHEDULED P&A OPERATIONS.



## THE CHALLENGE

Plug and abandonment (P&A) operations were scheduled to begin on two suspended gas wells located in South Australia as part of a multi-well campaign. The operator had set reservoir suspension plugs but had since observed sustained casing pressure (SCP) building in both wells. A rapid, offline well survey was required to investigate the source of the SCP so that rig-based P&A operations could be planned efficiently to minimise overruns and avoid impacting the wider campaign.

The wells were both high temperature, being around 200° C at the depth of the suspension plugs. This temperature is challenging for traditional well surveys because it can affect electronic sensors. The wellsite was also in a remote location, with no infrastructure on site other than a light tower with an auxiliary power supply.

## THE SOLUTION

Given the time, temperature, resource and location challenges, Fiberline Intervention (FU) offered the ideal solution and the operator commissioned Well-SENSE to provide a rapid distributed fibre survey on both wells. WellSENSE quickly dispatched two engineers to the wellsite, with survey equipment and wellhead cross-overs in a lightweight vehicle.

FU equipment was rigged up, then temperature and acoustic sensing fibres were deployed into the wellbore to deliver a dynamic, real-time picture of downhole activity. Each FU rig-up, 3,000 m. depth survey and rig-down were completed within a single day shift.

The two leak detection surveys were supported by a wellhead crew who bled -off the annulus pressures and then allowed pressure to rebuild so that the source could be identified. The surveys were also supported by a real-time analyst in the UK monitoring the data via satellite.

Distributed temperature sensing (DTS) and distributed acoustic sensing (DAS) fibres can monitor conditions at variable distances from the fibre - in the wellbore, in the annulus or in the formation. They monitor depths and distances simultaneously, creating a relative picture in and around the production tubing, production casing, intermediate casing and surface casing, enabling multi-annulus behaviour to be observed. The fibres naturally adhere to the wall of the well and are fixed at the wellhead, allowing precise location measurements to be obtained.





## THE RESULTS

### Well I

- Fibre was deployed to depth through the production tubing.
- Sequential annulus pressure manipulation:
  - Surface casing (SC) pressure of 123 PSI bled off.
  - Intermediate casing (IC) pressure of 587 PSI bled off.
  - Production casing (PC) pressure of 325 PSI bled off.
  - Tubing pressure of 168 PSI bled off.
- FLI identified three leak paths in this well: a) Below the SC shoe from the formation; b) Below the IC shoe from the

- formation; c) Through the PC from below the depth of the FLI probe.
- Surface casing and intermediate casing pressures are indicated to be reservoir fed.
- Production casing and tubing pressure is via a leaking packer and annular cement plug.
- A tubing leak was detected at 906m with no other indications of leaking tubing or casing.
- The tubing bridge plug is holding.



### Well I, Leak Path 1:

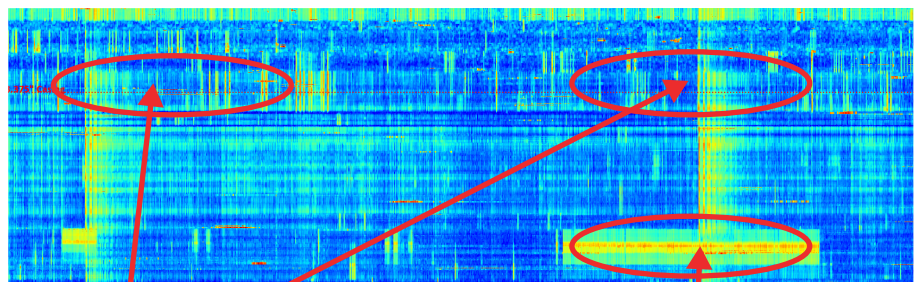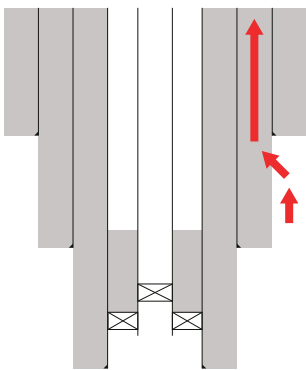

Events centred at SC shoe indicate flow

Fluid movement past formation shortly after SC bleed off



### Well I, Leak Path 2:

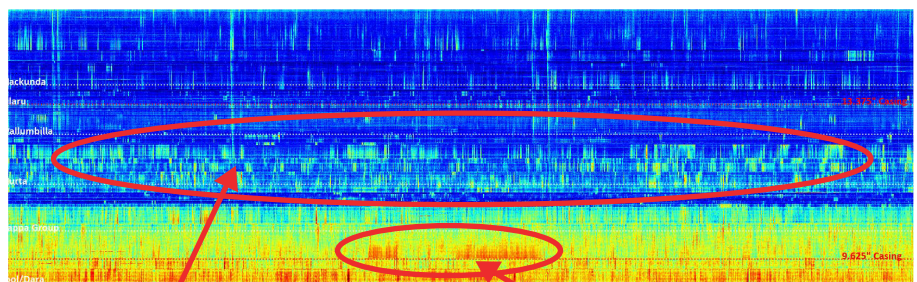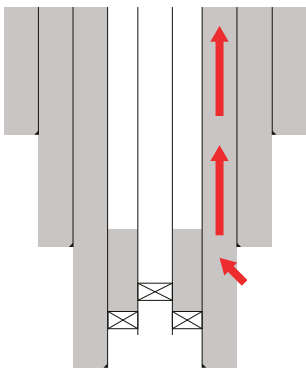


Signal from tortuous flow path above IC shoe

Activity at the IC shoe indicates leak entry point

### Well I, Leak Path 3:

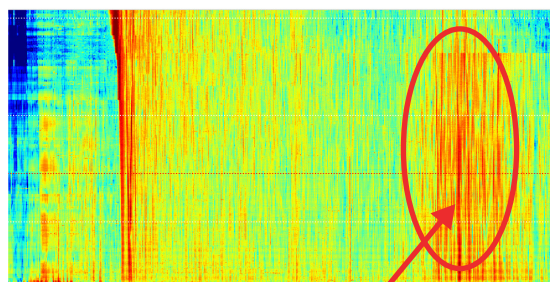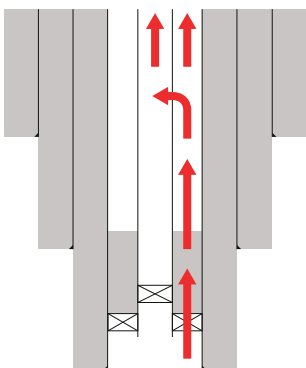

Leak through PC from below fibre depth shortly after PC bleed off





Tubing leak at 906m

## Well 2

- Fibre was deployed to depth through the production casing as the tubing had already been removed.
- SC pressure of 24 PSI was bled off.
- PC pressure of 95 PSI was bled off.
- FLI data identified two leak paths: a) A flow past the

- formation below the SC shoe and through cement channels above the SC shoe;
- b) From the formation upwards through the PC plugs.
- SC pressure was indicated to be reservoir fed via cement.
- Production casing plugs are leaking.
- No evidence of leaking tubulars.



### Well 2, Leak Path 1:

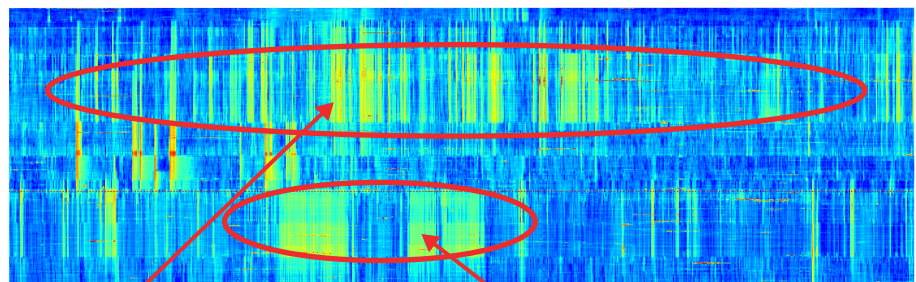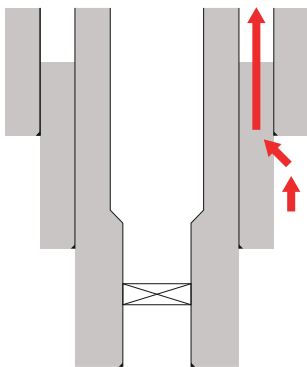


Signal indicating flow through cement channels above SC shoe

Signal indicating flow past formation below SC shoe shortly after SC bleed off

### Well 2, Leak Path 2:

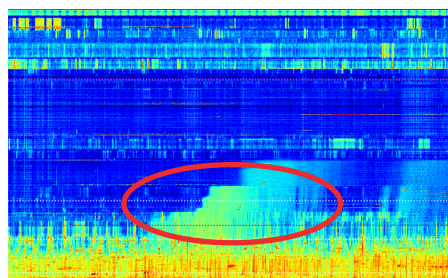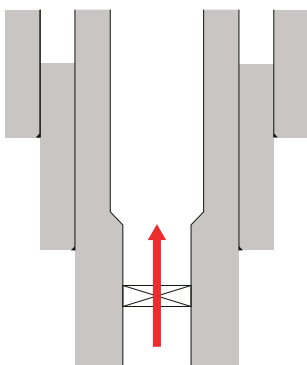

Signal from logging depth showing upwards pressure plume through PC plugs

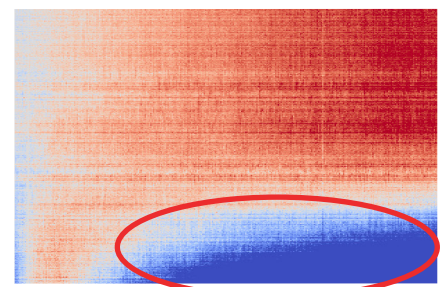

Cooling effect above PC plugs due to gas expanding as it passes through plug leak path

## SUMMARY

The DAS and DTS data indicated that the source of SCP in both wells was the reservoir and not leaking casing strings or shallower gas producing formations. As a result, the P&A plan was developed to include remediation below the IC shoe, eliminating multi-string section milling or perforating and associated rig time and cost.

The operator was a new client for Well-SENSE and was impressed with the quality and accuracy of the data, especially given the project challenges. They plan to use FLI again for complex well abandonment and integrity issues.

## VALUE

- Full well depth, multi annulus data acquired in a single day
- Ability to obtain data at 200°C and higher
- Lighter equipment rig up
- Less personnel
- No dynamic wellhead seal
- No downhole electronics (200C can cause a reliability issue for logging tools)
- FLI is well suited to land well integrity surveys, with minimal on-location support infrastructure required.
- Well-SENSE provides a fully integrated service which includes project planning, mobilisation to site, well deployment, data processing, analysis and reporting, including 'first look' data from the wellsite.

